



Specification

High Performance 2'x4' Indirect Troffer

LED


50,000 Hours Life, 50Watt, 120-277VAC

Applications:


Ceiling, T-Bar Drop Ceiling, Troffer Replacement

Features:

- Instant On LED
- Replaces 3&4 Lamp Fluorescent Troffer
- 10% 0-10V Dimming
- Long Life 50,000 Hours
- White Framed Edge
- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries. (Sold Separately)

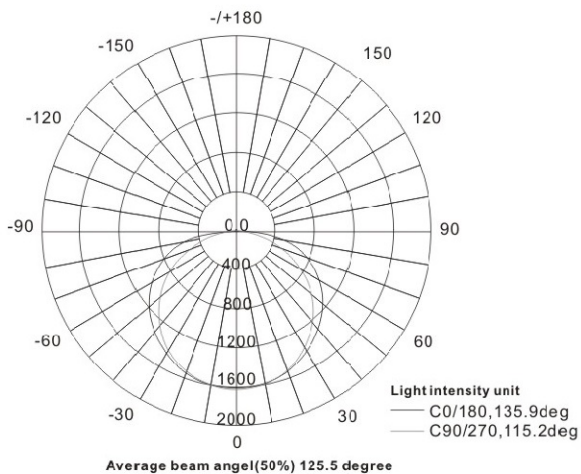

Recessed

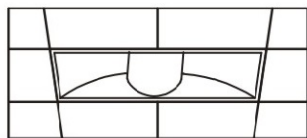

Catalog Number


Notes

Type



Specification:

Input Line Voltage:	120-277VAC
Input Power	50W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CCT	4000K
CRI	≥80
Lumens	4200
CBCP	1632
Power Factor	<0.90
THD	20%
Dimmable	10% 0~10V

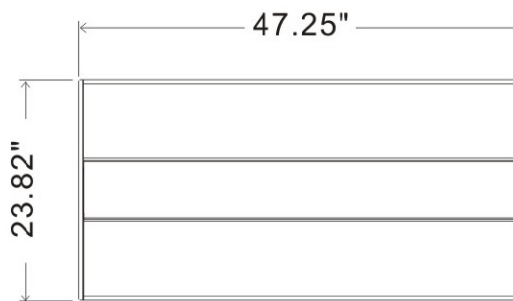

WARRANTY
5-YEAR *

Model:#	Description	wattage	lumens
CL50IDTF24/CW	50 Watt LED Panel Cool White	50W	4200

*Based on 3hours usage a day

UPC: 680596-583264



Cyber Tech Lighting, Inc.
 1301 E Wilshire Ave, Santa Ana, CA 92705
 Tel: 714-543-8500, 1-877-60CYBER Fax: 714-543-8501
 www.cybertechlighting.com



CL8-0616