

Emergency Backup for Outdoor Fixtures



100-277VAC, 60Hz, 4Watt


Features:

- UL Listed Driver
- Driver tested UL924 and to CSA C22.2 NO.141 can be field or factory installation
- Low energy consumption CEC compliance
- · Includes water tight LED test switch
- · Includes mounting hardware
- · Bronze aluminum water tight case
- For use with outdoor wall packs, through its standard knockout
- Lumens calculated by multiplying fixture LPW x 4 watts of input power



Applications:





Specifications:


Input Line Voltage	100-277VAC	
Innut Line Frequency	50/60Hz	
Input Current	100mA	
Input Power Rating	5W max	
Output Voltage	50VDC max	
Emergency Power	4W	
Deckery Time	24Hrs	
Discharge Time	1.5H	
Ambient Temp	5-50°C	
Battery		
Weight	2.2LB	
Surge Protection	Line-Neutral 3KV	

Note: For use with fixtures that employ Isolated drivers only

WIRING DIAGRAM 1

GREEN AC-L AC-N WHITE WALL SWITCH LED DRIVER BROWN LED BLUE CHARGING INDICATOR HED BLACK WHITE BROWN TEST SWITCH CHARGING INDICATOR WHITE BLUE CHARGING INDICATOR WHITE BLUE CHARGING INDICATOR WHITE BLUE CHARGING INDICATOR WHITE CHARGING INDICATOR WHITE CHARGING INDICATOR WHITE CHARGING INDICATOR WHITE CHARGING INDICATOR ON OFF CHAR

WIRING DIAGRAM 2

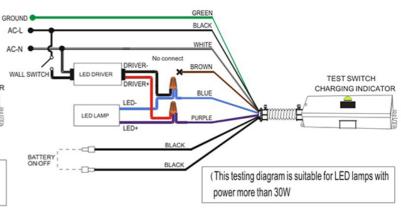

Description	Wattage
4W Battery Backup with Outdoor Case	4W

2 Year Limited Warranty

Cyber Tech Lighting,Inc.
331 S. Hale Ave. Fullerton, CA 92831 USA.
Tel:714-870-0794, 1-877-60CYBER Fax:714-870-0795
www.cybertechlighting.com

Bronze Color

