

## LED

25,000 Hours Average Rated Life, 12 Volts

### Applications:

#### Low Voltage Elevator Lighting

Replaces 15Watt 1383 and GBF,25Watt GBK Incandescent Lamps.

*Elevator Cab Lighting,*

*Buses, Boats, Down Lighting, Spot Lighting, Cabinets*




### Features:

- Replace Existing Halogen Lamps And Save 80% Energy
- Instant On High Power LED Bulb
- Maintenance saving
- Last Up To 25,000 Hours
- Contains No Mercury
- Extruded/Cut Aluminum Body For Better Heat Dissipation
- No UV Or Infrared Radiation
- Shatter Coating or shields not needed-NO Glass
- Compatible with on/off cycling occupancy controls system

### Specification:

Input Line Voltage:	10-14V AC/DC
Input Power:	2W/3W
Input Line Frequency:	50/60Hz
Lamp Life (Rated):	25,000hrs
Minimum Starting Temp:	-20°
Maximum Operating Temp:	40°C
CCT:	3000K
CRI:	(2W)80, (3W)75

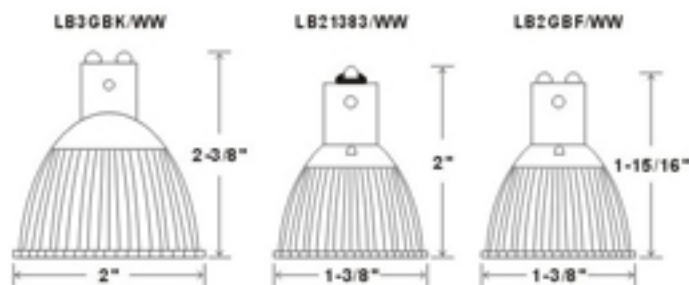

### 3000K/30° BEAM ANGLE

Throw Distance	2W Illuminance	3W Illuminance
0.5m	1030 Lux	1540 Lux
1.0m	260 Lux	390 Lux
1.5m	110 Lux	170 Lux
2.0m	70 Lux	100 Lux



**WARRANTY**

**2-YEAR**

Model:#	Description	wattage	lumens	base
LB21383/WW	LED 2W 1383 elevator lamp (single contact)	2W	75	BA 15S
LB2GBF/WW	LED 2W GBF elevator lamp (double contact)	2W	75	BA 15D
LB3GBK/WW	LED 3W GBK elevator lamp (double contact)	3W	110	BA 15D

Cyber Tech Lighting, Inc.

1301 E Wilshire Ave, Santa Ana, CA 92705

Tel: 714-543-8500, 1-877-60CYBER Fax: 714-543-8501

www.cybertechlighting.com