

**LED**  
TECHNOLOGY

100/347VAC 50/60Hz 30Watt

**Applications:**

UFO High Bay, Low Bay Lighting

**Features:**

- Self diagnosing system, monthly and yearly
- 6KV high voltage surge protection
- Protection against: short-circuit, over-load, open-circuit
- Universal input range, 100-347Vac, 50/60Hz
- Optimized design for mounting with UFO fixture
- Attachment parts and water tight connectors included
- Wireless emergency test Remote available (Sold Separately)
- UL listed for factory and/or field installation
- Lumen calculated by fixture LPWx30W of input power

**Accessories:**

Backup Test Remote



Sold Separately




**Specification:**

Input Line Voltage:	120-347VAC
Input Power	15W
Input Line Frequency	50/60Hz
Input Current	≤200mA
Minimum Starting Temp	-0°C/-32°F
Maximum Operating Temp	50°C/122°F
Output Voltage	≤ 170DC
Output Watt	30W
Battery Type	Li-ion
Charging Time	24hrs
Emergency Operation	≥90min
Weight	7.3lbs
Weather Rated	IP65

Important note: This unit operates through fixtures low voltage dimming wires

**Dimensions**

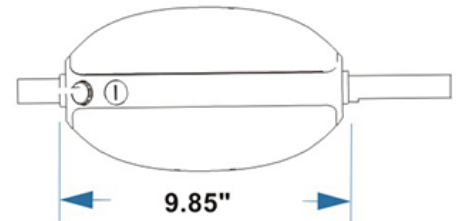

Weight:7.3lb

**WARRANTY**  
\* 2-YEAR

Item:#	Description	wattage
BK300UFO	30W 170V Output Emergency Backup	30W
BK300UFO-Remote	Remote to Test Emergency Function	—

\* 2 Year Limited Warranty

