


LED
TECHNOLOGY

50,000 Hours Life, 8.7 Watt, 120VAC, 90CRI

Applications:

4" Recessed Can Kit,
Indoor And Damp Locations Use





Features:

- Adjustable 5 Color 2700K, 3000K, 3500K, 4000K and 5000K
- Replace Incandescent Save 80% Energy (75 Watt Equivalent)
- Instant Bright, High Power LED Bulb
- Smooth Dimming to 10% or Below
- Dims on Most Standard Household Dimmers
- Fits Standard 4 Inch Recess Cans
- Comes with Standard Quick Connect Plug
- Flicker Free, Tested for No Buzzing
- High Efficacy 90CRI True Color



Specification:

| | |
|-------------------------|-------------------------------|
| Input Line Voltage: | 120VAC |
| Input Power: | 8.7W |
| Input Line Frequency: | 60Hz |
| Lamp Life (Rated): | 50,000hrs |
| Minimum Starting Temp: | -20°C/-4°F |
| Maximum Operating Temp: | 40°C/104°F |
| Adjustable CCT: | 2700K/3000K/3500K/4000K/5000K |
| CRI: | ≥90 |
| Lumens: | 750 |
| Beam Angle: | 95° |
| CBCP: | 335 |
| Dimmable: | Standard Triac Dimmer |

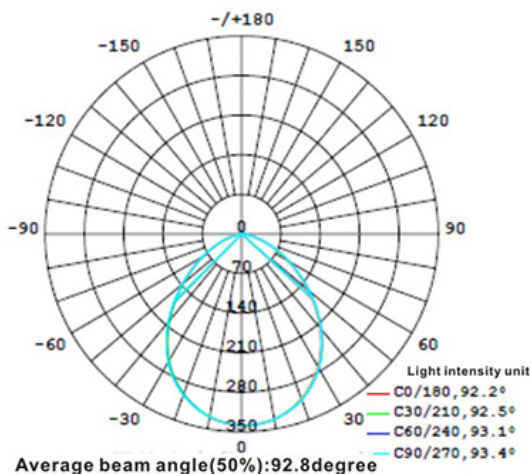

| Height | E Avg/E Max | Beam Angle 90° Deg | Diameter |
|--------|----------------|--------------------|-----------|
| 1m | 151.7, 339.31x | | 200.00cm |
| 2m | 37.92, 84.821x | | 400.00cm |
| 3m | 16.85, 37.701x | | 600.00cm |
| 4m | 9.479, 21.201x | | 800.00cm |
| 5m | 6.067, 13.571x | | 1000.00cm |
| 6m | 4.213, 9.4241x | | 1200.00cm |
| 7m | 3.095, 6.9241x | | 1400.00cm |
| 8m | 2.370, 5.3011x | | 1600.00cm |
| 9m | 1.872, 4.1891x | | 1800.00cm |
| 10m | 1.517, 3.3931x | | 2000.00cm |

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

2-YEAR*

| Model:# | Description | wattage | lumens | Socket |
|--------------------|---|---------|--------|--------|
| LC10RT4-S3/CCT/6PK | 4 Inch Dimmable, Smooth Retrofit Can Kit 5CCT, 6-Pack | 8.7W | 750 | E26 |

* 2 Year Limited Warranty Damp Locations Rated This Luminaire is JA8-2019 Compliant

UPC:80680215615-6