


**LED**  
TECHNOLOGY

50,000 Hours Life, 14Watt, 120VAC

**Applications:**

For 6 Inch Recessed Cans  
or Surface Mount to 3.5"-4" J-Box Luminaire




**Features:**


- Adjustable 5CCT 2700K, 3000K, 3500K, 4000K and 5000K
- Recess look, Fits Standard 3.5"-4"J-Box
- Replace Incandescent Save 80% Energy (100 Watt Equivalent)
- Instant Bright, High Power LED Bulb
- Rated Life of 50,000 Hr
- Smooth Dimming to 10% or Below
- Dims on Most Standard Household Dimmers
- Suitable for Wet Location
- High Efficacy 90CRI True Color




Luminous Intensity Distribution Curve

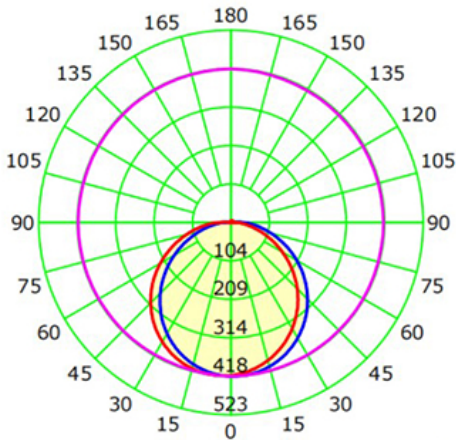

Average Diffuse Angle(50%): 114.9° Unit: cd

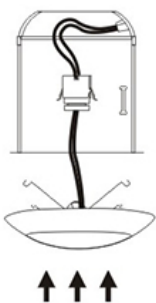


For: 3-1/2 Or Larger J-Boxes



**Specification:**

Input Line Voltage:	120VAC
Input Power	14
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
Adjustable CCT	2700K/3000K/3500K/4000K/5000K
CRI	≥90
Lumens	1100
CBCP	418
Beam Angle	110°
Dimmable	Standard Triac Dimmer

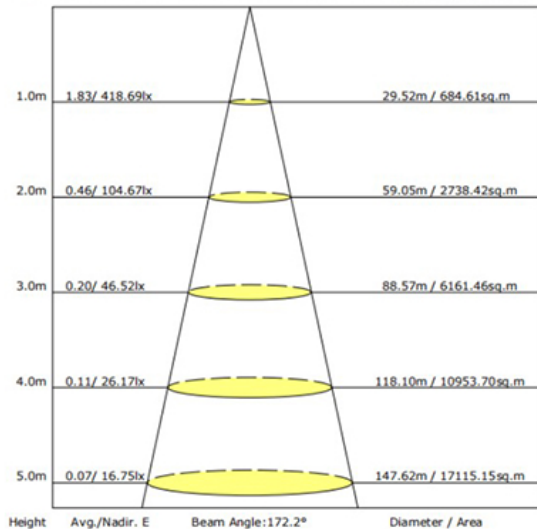

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**  
2-YEAR

Model:#	Description	wattage	lumens	Socket
LC20RT6-DISK/CCT	3.5"-4" J-Box Dimmable Surface Mount Disk Adjustable 5CCT	14W	1100	E26

\* 2 Year Limited Warranty

UPC: 80680215560-9

