


LED
TECHNOLOGY

**50,000 Hours Life, 300/240/200 Watt, 120-277VAC
50/60Hz**

Applications:

*Parking Lots, Security Lighting, Pole, Post Mount,
Walkways, Roadways, Facade Lighting.*

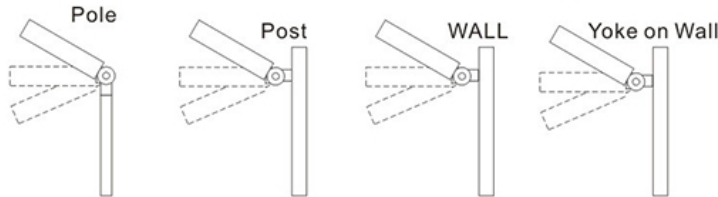

Optional Mounts Available

ADJUSTABLE
LIGHT COLOR

3000K
WARM WHITE

4000K
COOL WHITE

5000K
DAY LIGHT



Features:

- Adjustable Wattage 300/240/200Watt, Replace 1000W MH Unit
- Adjustable 3CCT 3000K, 4000K, 5000K
- Suitable For Wet Location (IP65)
- Aluminum Rust Proof Body
- Adjustable Up/Down with Any Arm/Fitter
- Type 3 Light Distribution Pattern
- Accessories Sold Separately

ADJUSTABLE
WATT

300 WATTS	45,000 LUMENS
240 WATTS	36,000 LUMENS
200 WATTS	30,000 LUMENS

Specification:

Input Line Voltage	120-277VAC
Input Power	300/240/200W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	46°C/115°F
CCT	3000K/4000K/5000K
CRI	80
Lumens	45000/36000/30000
Dimmable	0-10V
EPA	1.92ft ²

Accessories:

LWP-SBA-SF
Slip Fitter

LWP-SBA-WPM
Pole Mount/Wall Mount

LWP-SBA-YM
Yoke Mount




Motion Sensor


Photocell



Luminous Intensity Distribution Curve

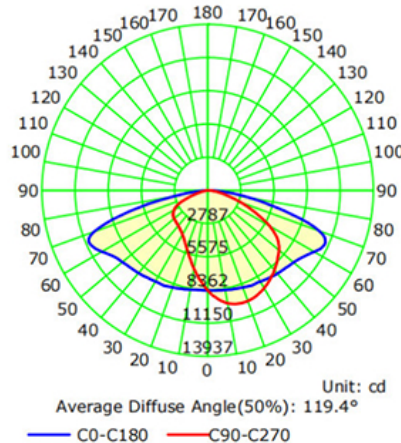

Height	Avg./Nadir, E	Beam Angle: 153.4°	Diameter / Area
1.0m	601.45/ 8400.83lx		8.47m / 56.38sq.m
2.0m	150.36/ 2100.21lx		16.94m / 225.50sq.m
3.0m	66.83/ 933.43lx		25.42m / 507.38sq.m
4.0m	37.59/ 525.05lx		33.89m / 902.00sq.m
5.0m	24.06/ 336.03lx		42.36m / 1409.38sq.m
6.0m	16.71/ 233.36lx		50.83m / 2029.50sq.m
7.0m	12.27/ 171.45lx		59.31m / 2762.38sq.m
8.0m	9.40/ 131.26lx		67.78m / 3608.00sq.m
9.0m	7.43/ 103.71lx		76.25m / 4566.38sq.m
10.0m	6.01/ 84.01lx		84.72m / 5637.50sq.m

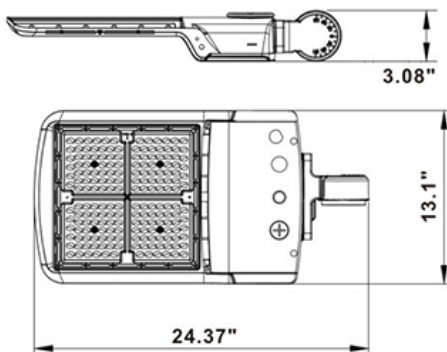

Model:#	Description	Adjustable Wattage	Metal Halide Equivalent	Lumens
LWP300SB/CCT	300/240/200 Watt LED Area Light Bronze Finish, Adjustable CCT	300W 240W 200W	1000W	45000 36000 30000

DLC 5.1

*5 Year Limited Warranty

UPC: 74616080124-7

