

LED
TECHNOLOGY



50,000 Hours Life, 11 Watt, 120VAC, 90CRI

Applications:

4" Recessed, Down Light with J-Box
Indoor And Outdoor Wet Locations Use

Features:

- Adjustable CCT 2700K, 3000K, 3500K, 4000K, and 5000K
- Replace Incandescent Save 80% Energy (90 Watt Equivalent)
- Fire Resistant, Able to Withstand 1850° for up to 2 Hours
- Rated Life of 50,000 Hr
- Smooth Dimming to 10%
- Dims on Most Standard Household Dimmers
- IC Rated
- Flicker Free
- High Efficacy 90CRI True Color
- Knockout for Romex or Flex Connection

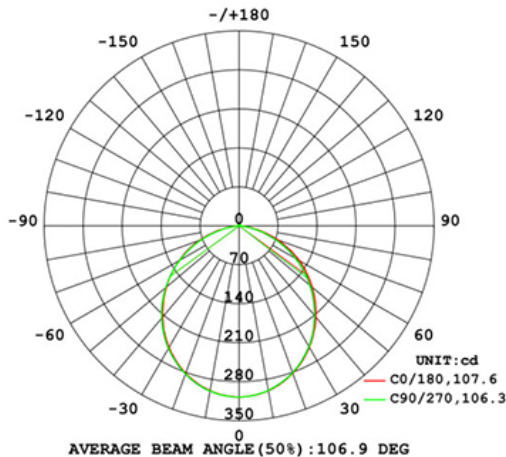


Specification:

Input Line Voltage:	120VAC
Input Power:	11W
Input Line Frequency:	60Hz
Lamp Life (Rated):	50,000hrs
Minimum Starting Temp:	-20°C/-4°F
Maximum Operating Temp:	40°C/104°F
Adjustable CCT:	2700K/3000K/3500K/4000K/5000K
CRI:	≥90
Lumens:	900
Beam Angle:	110°
CBCP:	307
Dimmable:	Standard Triac Dimmer

1.219m	66.14, 206.81x	325.61cm
2.438m	16.53, 51.701x	651.22cm
3.658m	7.348, 22.981x	976.82cm
4.877m	4.133, 12.921x	1302.43cm
6.096m	2.731, 8.5381x	1602.40cm
7m	2.006, 6.2731x	1869.47cm
8m	1.536, 4.8031x	2136.53cm
9m	1.214, 3.7951x	2403.60cm
10m	0.9831, 3.0741x	2670.67cm

Height Eavg, Emax Angle: 106.34deg Diameter

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

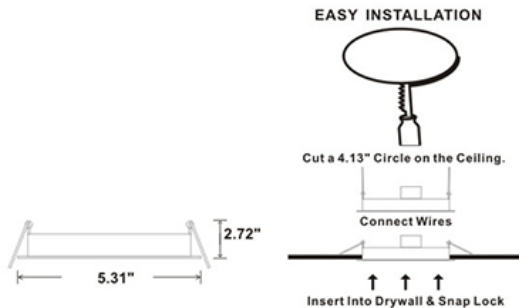

WARRANTY

2-YEAR*

Model:#	Description	wattage	lumens	Socket
LC10RT4-NFRBXCCT	4 Inch Dimmable, Fire Rated LED Can-Less Down Light 5CCT	11W	900	N/A

* 2 Year Limited Warranty

Wet Locations Rated This Luminaire is JA8 Compliant

UPC: 74616080151-3